

GLACIERUVLED

By **LUMINOR**




THE EVOLUTION OF WATER TREATMENT

OEM MODULE AND INTEGRATED LED SYSTEM

As the development of UVC LED technology continues its rapid growth, LUMINOR has expanded its product line to include UVC LED technology.

These compact UVC LED modules provide up to 99.99% pathogen reduction* and have a global reach with a myriad of applications ranging from residential water treatment, water dispensers, appliances, food service, RV, marine, medical, disaster relief and many more.

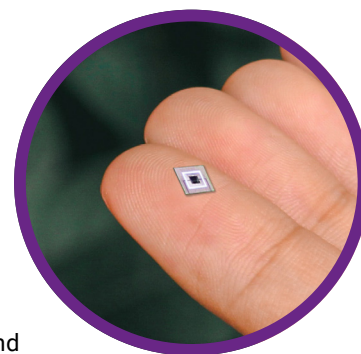

UVC LED module

*shown with optional mounting bracket

GUV-4S

GUV-5S

WHY LED?

- Compact footprint, high power density UVC LEDs combined with integral solid state control architecture allow for a much smaller installation footprint than traditional UV systems.
- UVC LEDs are "instant-on" devices, requiring no warm-up time to achieve disinfection*. This allows for on-demand operation in response to water flow.
- UVC LEDs have an extremely long service life resulting in reductions in lamp replacement and labour expenses.
- Unlike traditional UV lamps UVC LEDs are free of mercury, eliminating the risk of a mercury spill due to a lamp breakage.
- Unlimited cycling—UVC LED is not impacted by on/off cycles.
- Temperature independent, constant UVC output regardless of water temperature. Plus, UVC LEDs do not transfer heat from the light emitting surface, thus limiting lamp fouling.
- Wavelength selectivity—LUMINOR can custom-tailor the wavelength of the LED module for customized UVC applications.

MANUFACTURER'S WARRANTY

GLACIER UV LED modules are covered by a One (1) year Limited Warranty



See luminoruv.com for complete warranty document, including conditions and exclusions.



GLACIER UVC LED System Specifications

MODEL	GUV-4S	GUV-5S
Flow Rate @ (10 mJ/cm ² at 95% UVT)	1.5 GPM 5.6 lpm	1.5 GPM 5.6 lpm
Flow Rate @ (16 mJ/cm ² at 95% UVT)	1.3 GPM 4.9 lpm	1.3 GPM 4.9 lpm
Flow Rate @ (30 mJ/cm ² at 95% UVT)	0.6 GPM 2.4 lpm	0.6 GPM 2.4 lpm
Flow Rate @ (40 mJ/cm ² at 95% UVT)	0.4 GPM 1.3 lpm	0.4 GPM 1.3 lpm
UVT (%)	Recommended above 90%	
Headloss at Max Flow	166 mBar (2.4 psi)	
Max Pressure	6.9 bar (100psi)	
Max Ambient Temperature	50° C (122° F)	
Operating Water Temperature	0-45° C (32-113° F)	
Water Connections	3/8" OD Tube (fits John Guest® style quick connect fittings)	
Input Voltage	12VDC	
Input Power	15W	16W
Electrical Connection	Standard 12VDC barrel connector, 2.1 x 5.5 mm	
LED Status Monitoring	YES	
LED Life Monitoring	YES	
LED Life	5,000 hours	
Solenoid Output	NA	YES (optional module (MOD-SOL) sold separately)
Dry Contacts (solenoid ready)	NA	YES (optional module (MOD-RAM) sold separately)
Sherpa	NA	YES (optional module (MOD-SHERPA) sold separately)
IoT	NA	YES (optional module (MOD-APP) sold separately)
Display	Dual colour LED	Full customizable colour screen
Overall Dimensions (with mounting brackets)	241mm x 104mm x 107mm (9.5in x 4.1in x 4.2in)	
Shipping Weight	400 g (14 oz)	

Specifications subject to change without notice.






* Third party microbiological testing in accordance with the US EPA drinking water guidelines



System Tested and Certified by WQA against NSF/ANSI-61 for material safety only. Certified to NSF/ANSI-372 for lead free compliance.

Sample screens available on GUV-5S controller



LUMINOR Environmental Inc.
80 Southgate Drive, Unit 4
Guelph, Ontario, CANADA
N1G 4P5

P: (519) 837-3800
TF: (855) 837-3801
F: (519) 837-3808
info@luminoruv.com

EPA Establishment
#088776-CAN-001

